

Respiratory protection mask

FFP2 NR D

TexiShield® CE 0082

Personal protective equipment Cat. III
EN 149:2001 + A1:2009



ADVANTAGES

- ✚ **Respiratory protection** | Filtering half masks against solid and liquid particles
- ✚ **Comfort & fit** | Back-of-head straps with removable elastics
- ✚ **Light & soft** | Optimal materials and design for continuous use of up to 8 hours
- ✚ **Airtight** | Perfect fit with nose bridge to limit leakage to the face
- ✚ **Made in France** | Located in Auvergne-Rhône-Alpes


SPECIFICATIONS

Brand: TexiShield® F2-B
Use: Single use, non sterile
Color: White
Wearing duration: 8 hours maximum


Expiry date: 5 years from date of manufacture
Country of origin: France
Quantity per case: 10, 25 or 50 masks
individually wrapped or not

References	Size/Packaging
TexiShield® F2-B	M
TexiShield® F2-B02	L
TexiShield® F2-B-NW	M - not wrapped
TexiShield® F2-B02-NW	L - not wrapped

Dimension

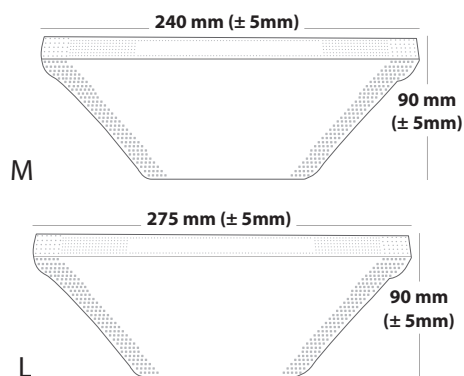

GRAPHENE & LATEX-FREE 3-LAYER MASK

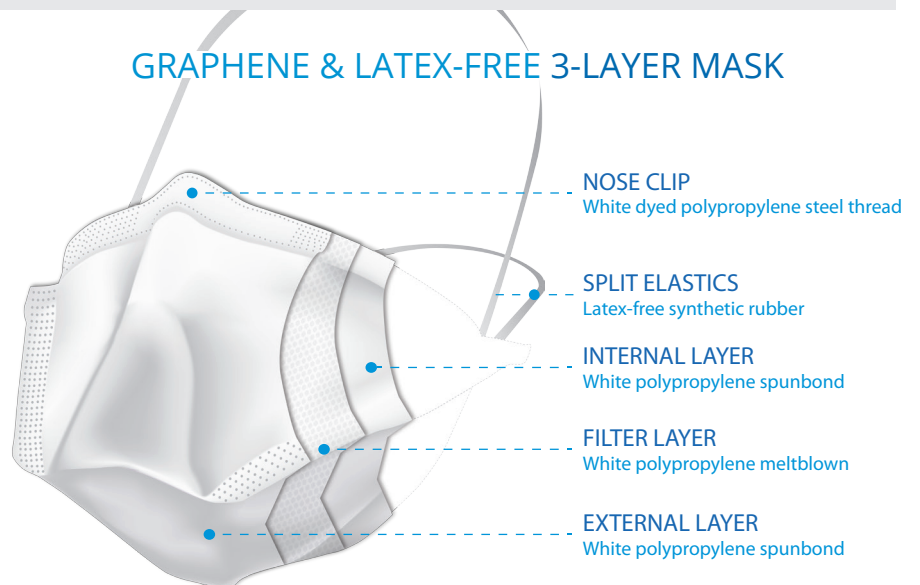

CERTIFICATIONS

- ✚ Complies with the **requirements of Regulation (EU) 2016/425 on personal protective equipment (PPE)** and the applicable standard **EN 149:2001 + A1:2009**
- ✚ Manufactured under an **ISO 9001:2015** and **ISO 13485:2016** certified quality management system (QMS)

STANDARD REQUIREMENTS

EN 149:2001+A1:2009

Tests	Requirement	Results
Paraffin oil penetration (liquid particles)	< 6 % lors de l'exposition 120 mg	✓ Compliant
NaCl penetration (solid particles)	< 6 % lors de l'exposition 120 mg	✓ Compliant
Carbon dioxide (CO2) content	≤ 1 %	✓ Compliant
Breathe resistance		
inhalation 30 l/min	≤ 0,7 mbar	✓ Compliant
inhalation 95 l/min	≤ 2,4 mbar	✓ Compliant
exhalation 160 l/min	≤ 3,0 mbar	✓ Compliant
Flammability	Must not burn or continue to burn for more than more than 5 seconds after removing the flame	✓ Compliant
Total leakage inside the unit	≤ 11 % for at least 46 / 50 results ≤ 8% for at least 8 / 10 results	✓ Compliant
Dolomite dust DRB 4/15 (D)	Inhalation and exhalation respiratory resistances ≤ 4.0 mbar at a continuous flow rate of 95 l/min	✓ Compliant

PACKAGING

REFERENCE	PACKAGING Box 30 x 38 x 28 cm	WEIGHT	DIMENSION (pallet in cm)
TexiShield® F2-B	Case of 10, 25 or 50 masks Box of 300 masks (6 cases of 50) Box of 450 masks (9 cases of 50)	Mask : 3,9 g Case of 50 : 370 g Box 300 masks: 2,60 kg Box 450 masks : 3,50 kg	L80 x P120 x H210

STORAGE & PRECAUTIONS

- ✧ Store according to packaging recommendations (**between 5 and 40°C and below 85% humidity**).
- ✧ The product expires **5 years after the date of manufacture**.
- ✧ **Follow instructions for use**.
- ✧ Recommended continuous wearing time: 8 hours max..

PACKAGING MARKING

Manufacturer	Batch number	Product reference	End of storage date	Protect from light and sunlight	Maximum relative moisture of storage conditions	
Temperature range of storage conditions	Latex free	For single use	Instructions and sorting box for recycling	Recyclable box	Read instructions for use	